



Transport Refrigeration



Exigo E1500 Powered for tomorrow

Daikin Exigo E1500 sets a new benchmark in performance, energy efficiency, and reliability in long haul transport. With its unique architecture, Exigo can run on electric power at full performance, making it future-proof.

Key Features

- Unique electric architecture with Daikin inverter technology providing 15kW true capacity both on engine and electric power
- Variable-speed compressor and fans for maximum pull-down performance and energy efficiency
- Reduced maintenance downtime with industry leading service intervals (3000 hours as standard)
- · Low noise as standard
- Ease of unit operation with high resolution graphical user interface
- Daikin components with proven reliability and a lightweight design
- GDP-compliant, supporting cold chain integrity of pharmaceuticals and medicinal products
- 2-year warranty, telematics, maintenance coverage and 24/7 emergency support included as standard
- EMEA sales and service network backed by Daikin








Exigo E1500

Specifications		E1500
Cooling capacity 30/0°C - Engine & Electric	[W]	14900
Cooling capacity 30/-20°C - Engine & Electric	[W]	9200
Heating capacity -20/+2°C - Engine & Electric	[W]	10500
Air Flow rate evaporator at max pulldown	[m ³ /h]	5500
Air throw	[m]	15
Engine		Kubota Custom Diesel Engine 1500 cc / 4 Cylinders NRMM Stage V Compliant
Generator		15kW / 400V 3P 50Hz / Direct Drive
Compressor		Custom scroll compressor economizer inverter
		Variable speed
Variable speed components		Compressor Evaporator fans Condenser Fans
Controller		Daikin PCB
User interface		7" High Resolution LCD
Temperature zones		Single
Refrigerant		R-452A
Total net weight	[kg]	730
Unit Dimensions W x H x D	[mm]	2072 x 2227 x 440
Connectivity		Telematics as Standard with 2-Year Subscription Included
Pharma		Certicold GDP certification

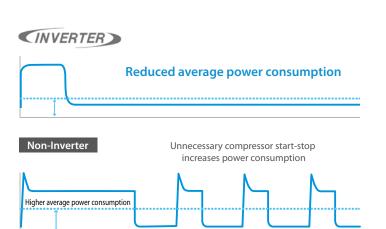



Power supply

Voltage

Frequency

Phase





Daikin.eu/transportrefrigeration





High resolution graphical user interface



Advanced telematics included as standard



Daikin PCB

Daikin Europe N.V. Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)

400

3P+N 50



ECPEN23-882 11/2023



C€

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.